



A pilot study investigating the air velocity inside a transport vehicle for pigs during transport

Joanna Klaaborg and Dorte Lene Schröder-Petersen

Department of Animal Science, Danish Technological Institute, Danish Meat Research Institute, Taastrup, Denmark

INTRODUCTION

Pigs' thermal comfort zone lies between 15 and 20°C. In Denmark, during the year, fluctuations between -8 and 32°C can occur. Most commercial pig transports are open, meaning that the temperature inside the transport vehicle, where the pigs are located, depends on the outside temperature. The thermal comfort of pigs during transport is maintained by adjusting the air flow surrounding the pigs through regulation of among others ventilation openings along sides of the vehicle. This mechanism is defined as **the chill factor** and expresses how air velocity can affect the experienced temperature. For pigs this mechanism is especially important because they have only a few functional sweat glands. However, there is no published data on the level of air velocity inside a transport vehicle during transport of pigs.



NO WIND
Heat surrounds
the body



WIND
Heat is
swept away

OBJECTIVE

To measure the air velocity inside a pig transport vehicle during transport under different climate settings.


CONCLUSION

In conclusion, the air velocity inside a commercial transport vehicle for pigs ranges between 0.5 and 1.5 m/s depending on the climate setting. This is useful knowledge when formulating a standardized management protocol for optimal climate setting during transport of pigs across the year. However, to make a firm conclusion on the optimal climate setting during transport, the effects of heat production from pigs during transport on air velocity must be included in future studies.

MATERIAL AND METHODS

The study was conducted in Denmark for two days in 2020. An anemometer (1590-PK-020/W Wind Master, Gill Instruments Limited, 60140-Hampshire, UK) was mounted on the lower deck of an empty pig transport vehicle, which measured air velocity and wind direction. An app (TracksLoggerPro) registered GPS coordinates and the speed of the transport vehicle, and the outside air velocity was retrieved from the Danish Meteorological Institute. The following model was used to analyse the effect of the climate setting on air velocity inside the transport vehicle in RStudio: Air velocity = μ + climate setting + β * direction of the vehicle + γ * speed of the vehicle + δ * outside air velocity.

The climate setting was a factor with 9 levels consisting of combinations of the degree of opening, use of mechanical ventilation and placement on the deck.

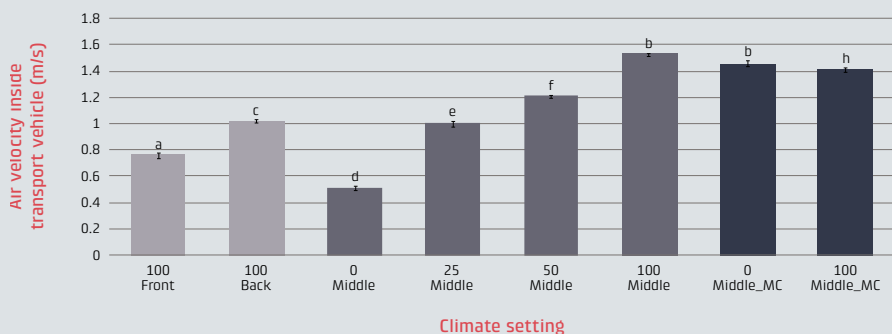

RESULTS

Results showed that air velocity inside the vehicle was significantly affected by the climate opening. The larger the ventilation opening, the higher the air velocity ranging from mean 0.51 m/s (0% open) to mean 1.46 m/s (100% open).

CONTACT INFORMATION



Joanna Klaaborg
Consultant
jokl@dti.dk

FINANCIAL SUPPORT STATEMENT

This study was funded by the Danish Technological Institute's performance contract 2018-2020, entered with the Danish Agency for Higher Education and Science, under The Ministry of Higher Education and Science, Denmark.

